

Hand Crank & Motor Driven Reels



COXREELS® 1125 Series “Competitor” hand crank and motorized hose reels have the features demanded by industry professionals. The industry preferred design features a sturdy one piece all welded “A” frame base, low profile outlet riser and open drum slot design provides a non-crimping, flat smooth hose wrap.


CALL FOR PRICE QUOTE.

1125 SERIES Offers...

- Hose I.D.: 3/8” - 1” Pressure: to 3,000 PSI
- One piece all welded steel “A” frame construction
- Low profile riser & open drum slot for smooth, even Hose wraps
- Direct gear drive on motor driven models - no chains
- Solid steel crank with smooth round handle
- Permanently lubricated pillow block bearings for smooth rotation
- Long-handled lock pin secures reel from rotation
- Adjustable friction brake assembly to brake or lock the Drum
- Brass NPT swivel inlet machined from solid (Zinc plated steel on 1” models)
- Swivel seals: NITRILE (AFLAS on 1” models)



1125 Series, Motor Driven With Optional Roller Hose Guide Sold Separately

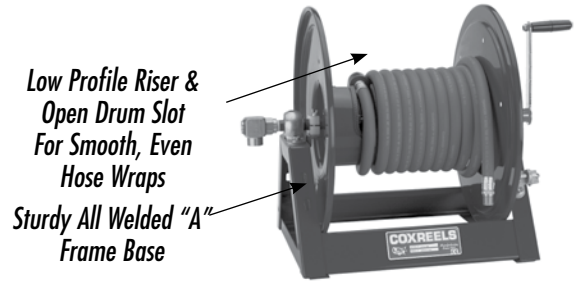

1125 Series, Hand Crank, Hose Not Included

MODEL	LESS HOSE						INLET SWIVEL ASSEMBLY	OUTLET RISER	PSI	Weight LBS.	SIZE INDEX
	STANDARD CAP.			OPTIONAL CAP.*							
	I.D.	O.D.	FT.	I.D.	O.D.	FT.					
1125-4-100	1/2"	7/8"	100	3/8"	3/4"	140	1/2" F NPT 90°	1/2" F NPT	3,000	36	1
1125-4-200	1/2"	7/8"	200	3/8"	3/4"	300	1/2" F NPT 90°	1/2" F NPT	3,000	39	2
1125-4-325	1/2"	7/8"	325	3/8"	3/4"	450	1/2" F NPT 90°	1/2" F NPT	3,000	48	3
1125-4-450	1/2"	7/8"	450	3/8"	3/4"	625	1/2" F NPT 90°	1/2" F NPT	3,000	52	4
1125-4-500	1/2"	7/8"	500	3/8"	3/4"	700	1/2" F NPT 90°	1/2" F NPT	3,000	58	5
1125-5-50	3/4"	1 1/4"	50	1/2"	7/8"	100	3/4" F NPT 90°	3/4" F NPT	3,000	38	6
1125-5-100	3/4"	1 1/4"	100	1/2"	7/8"	200	3/4" F NPT 90°	3/4" F NPT	3,000	42	7
1125-5-175	3/4"	1 1/4"	175	1/2"	7/8"	325	3/4" F NPT 90°	3/4" F NPT	3,000	50	8
1125-5-200	3/4"	1 1/4"	200	1/2"	7/8"	450	3/4" F NPT 90°	3/4" F NPT	3,000	55	9
1125-5-250	3/4"	1 1/4"	250	1/2"	7/8"	500	3/4" F NPT 90°	3/4" F NPT	3,000	59	10
1125-6-35	1"	1 7/16"	35	3/4"	1 1/4"	50	1" F NPT 90°	1" F NPT	3,000	50	11
1125-6-50	1"	1 7/16"	50	3/4"	1 1/4"	75	1" F NPT 90°	1" F NPT	3,000	55	12
1125-6-75	1"	1 7/16"	75	3/4"	1 1/4"	120	1" F NPT 90°	1" F NPT	3,000	62	13
1125-6-100	1"	1 7/16"	100	3/4"	1 1/4"	150	1" F NPT 90°	1" F NPT	3,000	69	14

CALL FOR PRICE QUOTE.



MOTOR DRIVEN MODELS

When ordering, suffix the model number with selection below. *Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS.*
A	AIR - #4 GAST	COMP. AIR MOTOR	8
E	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
EB	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
ED	ELEC. - EXPL. PRF.	1/2 HP REW. REV. TYPE	26
EA	ELEC. - EXPL. PRF.	115V 1/2 HP REW., AC REV. TYPE	26
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6

PORTABLE HOSE REEL CART Offers...



- Steel Round Handle Detaches For Compact Storage
- Steel Front Legs With Rubber Feet Prevent Sliding
- High Grade Ball Bearings With Hardened Cup
- 1/2" Diameter Steel Axle
- Solid 8" Rubber Tires
- For 8" Semi-Pneumatic Tires Order Model #PRP

PORTABLE CART (LESS REEL): Weight: 14 lbs.
 PN: PR-1125-6 - To be used with 1125-4-100 & 1125-5-50
 PN: PRP-1125-6 - To be used with 1125-4-100
 PN: PR-1125-12 - To be used with 1125-4-200
 PN: PRP-1125-12 - To be used with 1125-4-200

CARRY HANDLES Offers...



- Easily Bolts To "A" Frame Making The Reel Portable
- 1" Tube Steel Construction
- Powder Coated Crinkle Black


#PR-1125-HC Weight: 8 lbs.

SIGNATURE FEATURES:

- Professional Grade Heavy Duty Steel Construction
- Durable Proprietary CPC™ Powder Coat Process
- Rolled Edges & Ribbed Discs Provide Strength & Safety
- Leading 2-Year Manufacturer's Limited Warranty
- Made In The U.S.A. Sold & Supported Worldwide

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE IN-DEX	A	B	C	D	CRANK	ELEC.	AIR	F	CRANK	ELEC.	AIR
					E	E	E		G	G	G
1	6 1/4"	6"	17 1/2"	1138"	2134"	1838"	1612"	1518"	1818"	1834"	1834"
2	6 1/4"	12"	17 1/2"	1738"	2734"	2438"	2212"	1518"	1818"	1834"	1834"
3	6 1/4"	18"	17 1/2"	2338"	3334"	3038"	2812"	1518"	1818"	1834"	1834"
4	6 1/4"	24"	17 1/2"	2938"	3934"	3638"	3412"	1518"	1818"	1834"	1834"
5	6 1/4"	28"	17 1/2"	3338"	4334"	4038"	3812"	1518"	1818"	1834"	1834"
6	6 1/4"	6"	17 1/2"	1138"	2114"	1838"	1612"	1518"	1818"	1834"	1834"
7	6 1/4"	12"	17 1/2"	1738"	2714"	2438"	2212"	1518"	1818"	1834"	1834"
8	6 1/4"	18"	17 1/2"	2338"	3314"	3038"	2812"	1518"	1818"	1834"	1834"
9	6 1/4"	24"	17 1/2"	2938"	3914"	3638"	3412"	1518"	1818"	1834"	1834"
10	6 1/4"	28"	17 1/2"	3338"	4314"	4038"	3812"	1518"	1818"	1834"	1834"
11	8 1/4"	9 1/2"	17 1/2"	1478"	2514"	2178"	20"	1518"	1818"	1834"	1834"
12	8 1/4"	15 1/2"	17 1/2"	2078"	3114"	2778"	26"	1518"	1818"	1834"	1834"
13	8 1/4"	22"	17 1/2"	2738"	3734"	3438"	3212"	1518"	1818"	1834"	1834"
14	8 1/4"	28"	17 1/2"	3338"	4334"	4038"	3812"	1518"	1818"	1834"	1834"

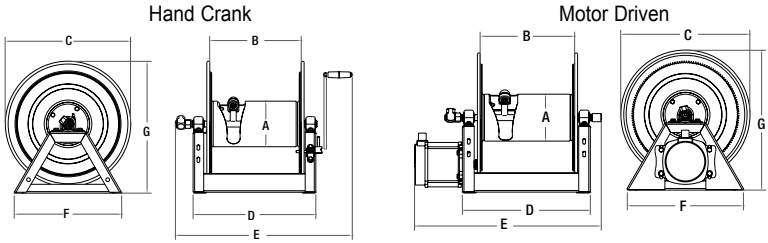

Available Options



Swivels

Swivels and Plumbing for pure product flow applications



Roller Brackets

Improve hose handling from any direction
 Many styles available



Switches

Adjust and set rewind speed
 Convenient on/off control
 Reverse/forward capability
 Many styles available



Hose Reel Swivels



PN	Reel Capacity	Description	Ports	Weight (lbs.)
SWVL-3/8	4000 PSI	Swivel, Viton seal	3/8M x 3/8 F 90°	1.2
SWVL-RK		Repair Kit		.1

Suction Hoses - Steel spiral molded into clear PVC, kink-proof suction lines

Featuring: PVC Steel Spiral, 100 PSI at 70°F, sold per foot



PN	Size	Description	Material	Weight (lbs.)
SHOSE-3/8PS	3/8	Suction hose	PVC	.2/ft.
SHOSE-1/2PS	1/2	Suction hose	PVC	.3/ft.
SHOSE-3/4PS	3/4	Suction hose	PVC	.4/ft.

Discharge Hose

Featuring: EPDM spray hose, sold per foot



PN	PSI Rating	Description	Hose Ends	Weight (lbs.)
30126	200	EPDM	3/8"	.15/ft.
30041	200	EPDM	1/2"	.2/ft.
30562	200	EPDM	5/16"	.23/ft.
30563	200	EPDM	3/4"	.25/ft.

Spray Hose - PVC, 600 PSI

Featuring: Braided synthetic cords in corrugated PVC cover and PVC tube



PN	Inside Diameter	Outside Diameter	Length	Weight (lbs.)
30564	1/4"	17/32"	300'	30
30421	3/8"	5/8"	300'	36
30536	1/2"	13/16"	300'	54
30565	5/8"	31/32"	300'	67
30566	3/4"	1-1/16"	300'	93